


»» MILLS GUARDS

PFR 04

PRODUCT SHEET

Last update:
04/13/2023

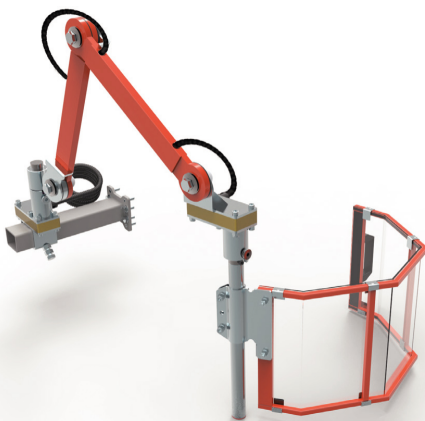

FEATURES

Protects the operator from direct contact with rotating parts of the vertical spindle and from the projection of shavings and lubricant-coolant. Attachable on the base flank, equipped with double opening system shield:

- 1) shield openable horizontally on its axis.
- 2) total "swinging" of the safety guard, outside the field of work.

Complete with double safety microswitch.

-Note: specify the mounting side by adding the suffix: /DX = right - /SX = left.

-Available accessories: PMG 60/185 - PBA 01/190 - PBA 01/325 - PBA 02/325.

1. Levelling anchorage stirrup - in tubular steel
2. Depth-adjustable safety guard support
3. Safety microswitch main box - 180° rotation - n. 2 NC contacts
4. Horizontal adjustment clamp
5. Articulated arms - in tubular steel.
6. Rubbing articulation with friction disc
7. Shield-arm connection clamp in pressed steel
8. Shield structure - in tubular steel
- g. Thermo-formed shield - in plastic shockproof and oil-resistant material

Universal safety guard with articulated arms. The rubbing articulations make it particularly versatile and able for immediate placement.

CODE	A	B	KG
PFR 04/400	400	235	9,8
PFR 04/500	500	235	10,1
PFR 04/600	600	235	10,4

Our protections comply with the machinery directive 2006/43/CE

CE
<https://www.tecnopiu.it/>